

## RS-8



A world first when introduced and still setting the standard, the RS-8 features three ECE approved functions in one compact unit. During daytime driving, the 20 x 0.5W LEDs illuminate to become daytime running lights (DRL). When the vehicle side lights are switched on by the driver, these LEDs run at reduced intensity, while switching on the vehicle High Beam, activates the 8 x 11W LEDs, to deliver exceptional visibility through to 350m+. Our *Dual-Optic* reflector system combine with advanced thermal management systems for optimising light output under all conditions.



## HYBRID OPTIC LED DRIVING LAMPS



RS-8











- \* LED Manufacturers Specifications \*\* At 14.4 Volts
- Dual optic reflector system delivers class leading distance and mid-range spread of light
- Integrated Daytime Running Light dims at night to become Position Light
- Highest output LED 'bins' selected for optimal performance
- CAE optimised heatsink and electronic thermal management
- 'Unbreakable' polycarbonate lens

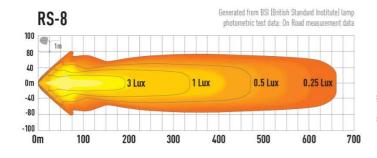

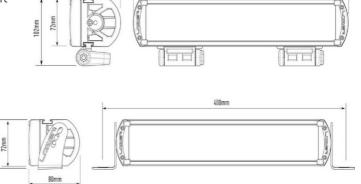

TECHNICAL SPECIFICATIONS

12.5

9V-32V

7264

Hybrid

88%

662m

8 +20

88 Watts

6.2 Amps

50.000 Hrs\*

1380 Grams

E-MARK REF

**VOLTAGE RANGE** 

**RAW LUMENS** 

BEAM PATTERN

OPTICAL EFFICIENCY

# HIGH POWER LEDS

POWER CONSUMPTION

CURRENT DRAW\*\*

WEIGHT

BEAM DISTANCE (0.25LX)

## MOUNTING OPTIONS







## LAZER LAMPS LTD Unit 2 Pages Old Mill, Tamworth Road, Hertford, SG13 7DG, UK Tel: +44(0)1992 677071

Email: sales@lazerlamps.com www.lazerlamps.com



