

GRABBER AT

THE ALL-TERRAIN TYRE FOR MAXIMUM FUN COMFORT AND SAFETY



Rim diameter	Size*	Load / Speed Index / Extra Load / Load Range	Side-wall	Permitted rim width min. (inch)	Permitted rim width max.	Dimensional tyre data	Tread pattern	Rolling circumference 1,5%-2,5% (mm)			
						max. in service outer-Ø (mm)	on measuring rim width (mm)	(mm)			
AT 15"	205/75 R 15	97T	BSW	5.5	7.0	701	211	11.2	2100	F	E
	215/75 R 15	100S	BSW	5.5	7.0	715	225	11.2	2142	F	E
	225/70 R 15	100S	BSW	6.0	7.5	709	237	11.2	2124	F	E
	225/75 R 15	102S	BSW	6.0	7.5	733	232	11.2	2195	F	E
	235/75 R 15	109S XL	OWL	6.0	8.0	747	244	11.2	2235	F	E
	255/70 R 15	108S	BSW	6.5	8.5	753	270	11.2	2255	G	F
	265/70 R 15	112S	BSW	7.0	9.0	767	282	11.2	2296	G	F
	30x9.50 R 15 LT	104S C	OWL	6.5	8.5	771	260	13.1	2308	G	C
	31x10.50 R 15 LT	109Q C	OWL	7.0	9.0	797	289	13.1	2386	G	C
	33x12.50R15 LT	108Q	OWL	8.5	11	828	323	13.1	2600	G	C
	35x12.50 R 15 LT	113Q C	BSW	8.5	11.0	897	343	13.1	2682	G	C
16"	215/65 R 16	98T	BSW	6.0	7.5	698	230	11.2	2092	F	E
	215/70 R 16	100T	BSW	5.0	7.0	720	230	11.2	2157	F	F
	LT225/75 R 16	115/112S E	BSW	6.0	7.0	764	236	13.1	2287		
	LT235/85 R 16	120/116Q E	OWL	6.0	7.5	828	249	13.1	2478	G	C
	LT235/85 R 16	120/116S E	OWL	6.0	7.5	828	249	13.1	2478	G	C
	LT245/75 R 16	120/116Q E	OWL	6.5	8.0	795	263	13.1	2380	G	C
	255/65 R 16	109T	BSW	7.0	9.0	752	270	11.2	2252	G	F
	LT265/75 R 16	123/120Q E	OWL	7.0	8.0	826	283	13.1	2472	F	C
	LT285/75 R 16	126/123Q E	OWL	7.5	9.0	858	303	13.1	2567	F	C
	235/70 R 16	106S	OWL	6.0	8.0	750	250	11.2	2247	F	E
	245/70 R 16	107S	OWL	6.5	8.0	764	258	11.2	2288	F	E
	255/70 R 16	111S	OWL	6.5	8.5	778	270	11.2	2330	F	E
	265/70 R 16	112S	OWL	7.0	9.0	792	283	11.2	2371	F	E
	265/70 R 16	112T	BSW	7.0	9.0	792	283	11.2	2371	G	F
	LT305/70 R 16	124/121Q E	OWL	8.0	9.5	858	330	13.1	2567	F	C
	LT315/75 R 16	127/124Q E	OWL	8.0	11.0	904	332	13.1	2703	F	C
17"	215/60 R 17	96H	BSW	6.0	7.5	700	230	10.8	2104		
	225/65 R 17	102H	BSW	6.0	8.0	736	237	10.8	2208		
	225/70 R 17	108T XL	BSW	6.0	7.5	748	237	11.2	2281		
	235/55 R 17	99H	BSW	6.5	8.5	700	255	10.8	2104		
	235/60 R 17	102H	BSW	6.5	8.5	726	250	10.8	2177		
	235/65 R 17	108H XL	BSW	6.5	8.5	750	240	10.8	2247	F	F
	245/65 R 17	111H XL	BSW	7.0	8.5	762	258	10.8	2287		
	245/70 R 17	110S	BSW	6.5	8.0	790	258	11.2	2366	F	E
	255/65 R 17	110H	BSW	7.0	9.0	778	270	10.8	2330	G	F
	255/70 R 17	112S	OWL	6.5	8.5	804	270	11.2	2408	F	E
	265/65 R 17	112T	BSW	7.5	9.5	790	283	11.2	2366	G	F
	265/65 R 17	112H	BSW	7.5	9.5	790	283	10.8	2366		
	265/70 R 17	115S	OWL	7.5	9.5	818	283	11.2	2449	F	E
	LT265/70 R 17	121/118Q E	OWL	7.0	8.5	826	288	13.1	2473	G	C
18"	235/60 R 18	107H	BSW	6.5	8.5	751	250	10.8	2253		
	255/55 R 18	109H XL	BWS	7.0	9.0	749	276	10.8	2245	F	F
	255/60 R 18	112H XL	BSW	7.0	9.0	755	270	10.8	2263	F	F
	LT275/70 R 18	125/122Q E	OWL	7.0	8.5	865	296	13.1	2589	F	C
19"	235/55 R 19	101H	BSW	6.5	8.5	751	255	10.8	2260		
	255/50 R 19	107H XL	BSW	7.0	9.0	749	276	10.8	2245	G	F
	255/55 R 19	111H XL	BSW	7.0	9.0	775	276	10.8	2323	F	F
20"	275/40 R 20	106H XL	BSW	9.0	11.0	670	302	10.8	2011	F	F
	275/45 R 20	110H XL	BSW	8.5	10.5	766	284	10.8	2297	F	F
AT2 15"	235/75 R 15	109S XL	OWL	6.0	8.0	747	244	11.2	2237	F	E
	35x12.50 R 15 LT	113Q C	OWL	8.5	11.0	903	343	13.7	2693	G	C
16"	225/75 R 16	108S XL	OWL	6.0	7.5	758	232	11.2	2269	F	E
	LT265/75 R 16	123/120Q E	OWL	7.0	8.0	826	283	13.1	2472	F	C
	LT295/75 R 16	123/120Q D	OWL	7.5	9.5	872	312	13.3	2604	F	C
	LT305/70 R 16	118/115Q D	OWL	8.0	9.5	858	330	13.3	2562	G	C
	LT315/75 R 16	121Q D	OWL	8.0	11.0	904	332	13.6	2696	G	F
17"	255/70 R 17	112S	BSW	6.5	8.5	790	270	13,7	2409	G	E
	LT265/70 R 17	121/118Q E	OWL	7.0	8.5	826	288	13,7	2470	G	C
18"	275/65 R 18	116S	BSW	7.5	9.5	829	290	13,7	2485	G	F
	LT285/60 R 18	112/119Q E	BSW	8.0	10.0	819	310	13,7	2455	F	C

* all sizes with rim protector (FR)

GRABBER AT

AN OFF-ROAD FEELING IN A NEW DIMENSION

ANYWHERE IS POSSIBLE

50%

off-road


50%

on-road



GRABBER AT

THE NEW GENERATION OF ALL-TERRAIN TYRES FOR MAXIMUM
FUN COMFORT AND SAFETY IS READY.

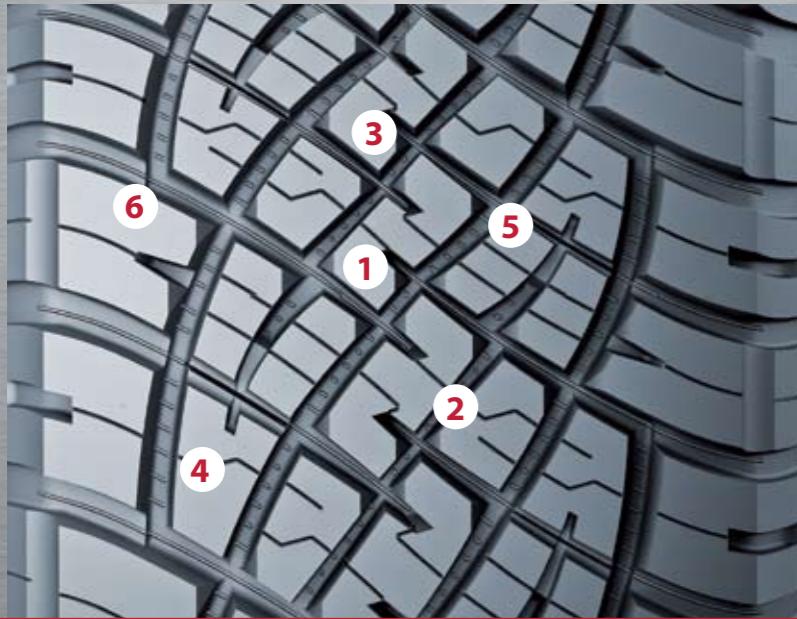

Pattern

- ① Traction edges for better transmission of circumferential and lateral forces on loose surfaces
- ② Micro sipe block structure as a draining system ensures further wet performance
- ③ Shifted and angled blocks for excellent traction and handling performance off-road
- ④ Traction ridges provide additional grip on mud and grass
- ⑤ Continuing main grooves for unhindered water flow and self-cleaning
- ⑥ Open shoulder for better self-cleaning effect



Product Features

Features

- ▷ Staggered middle and shoulder blocks with traction edges
- ▷ Open shoulders in line with central traction grooves
- ▷ Solid, stiffness and flexibility balanced blocks
- ▷ V-shaped grooves and turning block edges
- ▷ Angled block- and sipe orientation
- ▷ Continuing main grooves and siped blocks

Effects

- ▷ Excellent transmission of high lateral and circumferential forces
- ▷ Self-cleaning effect from centre to shoulder
- ▷ Flexibility against cut and chip, stiffness against aggressive forces
- ▷ Stone retention avoids tyre damages
- ▷ Smooth rolling in and out of block edges
- ▷ Draining of tread pattern

Benefits

- ▷ Outstanding traction and excellent steering performance off-road
- ▷ High grip in muddy terrain
- ▷ Robust tread pattern even in rough terrain
- ▷ Long lasting in rough conditions
- ▷ High comfort and low riding noise
- ▷ Best aquaplaning performance